

Silsaving

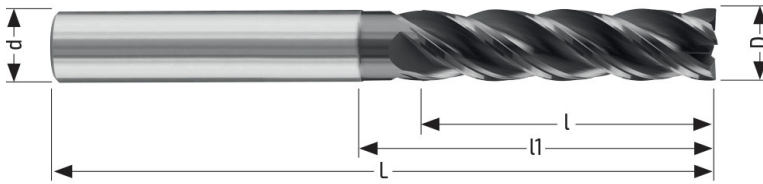

Frese alte prestazioni

894SL

Visit the online  
Product Sheet

# 894SL D.10

4 flute end mill long version with unequal flute spacing for  
stainless steel and mild steel

Silmax  
NORM $\lambda 38^\circ$ 

45°

## Details

|                           |       |
|---------------------------|-------|
| Diameter of cutting edge  |       |
| D h10                     | 10,00 |
| Shank Diameter            |       |
| d h6                      | 10,00 |
| Overall Length            |       |
| L                         | 87    |
| Cutting length            |       |
| l                         | 40,00 |
| Neck Relief Length        |       |
| l1                        | 46,0  |
| Neck Relief Depth         |       |
| a                         | 0,15  |
| Chamfering                |       |
| 45° 0,05/+0               | 0,15  |
| Number of Flutes          |       |
| Z                         | 4     |
| Shank references standard |       |
| Shank ref.                | HA    |

## Materials

Ferritic/Martensitic steel

Austenitic steel

## Coatings

Balinit® Alcrona (HMG)

Alternative Coatings

## Series long



This tool is available in 8 diameters.

Please consider the environment, before printing this document.