

Silsaving



Frese alte prestazioni

8955

Visit the online  
Product Sheet

# 8955 D.12

4 flute end mill regular version with variable helix and unequal flute spacing

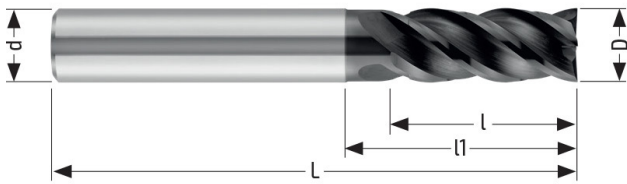

## Details

|                           |       |
|---------------------------|-------|
| Diameter of cutting edge  |       |
| D h10                     | 12,00 |
| Shank Diameter            |       |
| d h6                      | 12,00 |
| Overall Length            |       |
| L                         | 83    |
| Cutting length            |       |
| l                         | 26,00 |
| Neck Relief Length        |       |
| l1                        | 36,0  |
| Neck Relief Depth         |       |
| a                         | 0,20  |
| Chamfering                |       |
| 45°                       | 0,05  |
| '+0,05/+0                 |       |
| Number of Flutes          |       |
| Z                         | 4     |
| Shank references standard |       |
| Shank ref.                | HA    |

## Materials

|                                |  |
|--------------------------------|--|
| Steel < 800 n/mm <sup>2</sup>  |  |
| Steel < 1000 n/mm <sup>2</sup> |  |
| Steel < 1300 n/mm <sup>2</sup> |  |
| Grey cast iron                 |  |

## Coatings

Balinit® Alcrona (HMG)

## Alternative Coatings

## Series normal



This tool is available in 11 diameters.

Please consider the environment, before printing this document.