

Silsaving



Frese alte prestazioni

8955

Visit the online
Product Sheet

8955 D.16

4 flute end mill regular version with variable helix and unequal flute spacing

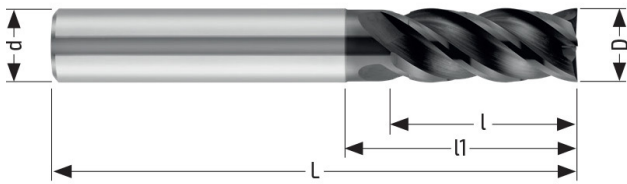

Details

| | |
|---------------------------|-------|
| Diameter of cutting edge | |
| D h10 | 16,00 |
| Shank Diameter | |
| d h6 | 16,00 |
| Overall Length | |
| L | 92 |
| Cutting length | |
| l | 32,00 |
| Neck Relief Length | |
| l1 | 42,0 |
| Neck Relief Depth | |
| a | 0,20 |
| Chamfering | |
| 45° | 0,05 |
| +0,05/+0 | |
| Number of Flutes | |
| Z | 4 |
| Shank references standard | |
| Shank ref. | HA |

Materials

| | |
|--------------------------------|--|
| Steel < 800 n/mm ² | |
| Steel < 1000 n/mm ² | |
| Steel < 1300 n/mm ² | |
| Grey cast iron | |

Coatings

Balinit® Alcrona (HMG)

Alternative Coatings

Series normal



This tool is available in 11 diameters.

Please consider the environment, before printing this document.