

HM

HRC

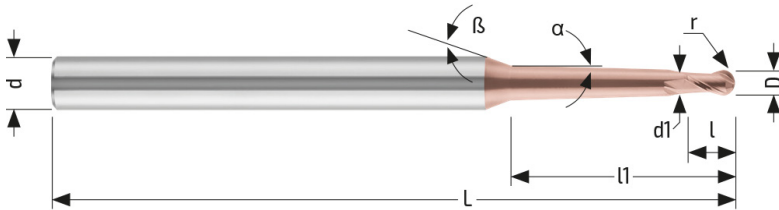
05220

Frese per stampi

Visit the online
Product Sheet

F05220H00120044

2 flute ball nose end mill for ribbing with tapered neck and reinforced shank

Silmax
NORM $\lambda 30^\circ$ 

Details

Diameter of cutting edge D +0/-0,02	1,20
Corner Radius/Radius Cr/r	0,60
Cutting length l	1,00
Neck Relief Length l1	30,0
Neck diameter d1	1,15
Neck Angle α	1,4
Engaged Angle β	12,0
Overall Length L	78
Shank Diameter d h6	6,00
$\epsilon 0,5^\circ$	
$\epsilon 0,5^\circ$	2,81
$\epsilon 1,0^\circ$	
$\epsilon 1,0^\circ$	5,57
$\epsilon 2,0^\circ$	
$\epsilon 2,0^\circ$	31,93
$\epsilon 3,0^\circ$	
$\epsilon 3,0^\circ$	35,35
Number of Flutes Z	2

Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC


Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

Shank references standard
Rif. gambo HA

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.