


HM HRC 06210 Frese per stampi

 Visit the online Product Sheet

F06210H00200011

2 flute corner radius end mill for ribbing with reinforced shank

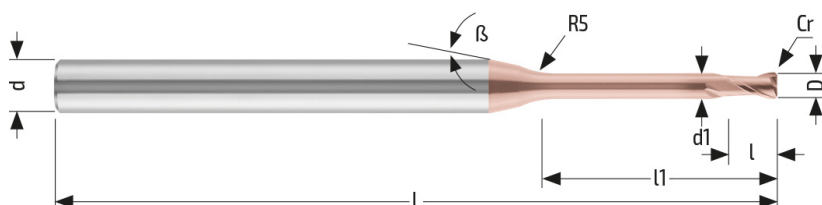

Details

Diameter of cutting edge D +0/-0,02	2,00
Corner Radius/Radius Cr/r	0,10
Cutting length l	3,00
Neck Relief Length l1	4,0
Neck diameter d1	1,90
Engaged Angle β	12,0
Overall Length L	50
Shank Diameter d h6	6,00
ε 0,5°	
ε 0,5°	4,91
ε 1,0°	
ε 1,0°	5,10
ε 2,0°	
ε 2,0°	5,42
ε 3,0°	
ε 3,0°	5,70
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials


Hardened steel 42 ÷ 52 HRC	
Hardened steel 52 to 62 HRC	

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.