

HM

HRC

07210


Frese per stampi



Visit the online  
Product Sheet

# F07210H00060013

2 flute corner radius end mill for ribbing

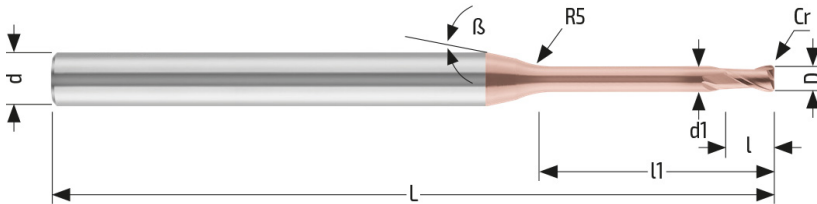

Silmax  
NORM

$\lambda$  30°



Cr

## Details

Diameter of cutting edge D +0/-0,02	0,60
Corner Radius/Radius Cr/r	0,10
Cutting length l	0,90
Neck Relief Length l1	5,0
Neck diameter d1	0,55
Engaged Angle $\beta$	12,0
Overall Length L	50
Shank Diameter d h6	4,00
$\epsilon$ 0,5°	
$\epsilon$ 0,5°	5,85
$\epsilon$ 1,0°	
$\epsilon$ 1,0°	6,12
$\epsilon$ 2,0°	
$\epsilon$ 2,0°	6,54
$\epsilon$ 3,0°	
$\epsilon$ 3,0°	6,89
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

## Materials


Hardened steel 42 ÷ 52 HRC
Hardened steel 52 to 62 HRC

## Coatings

Balinit® Tisaflex (HMH)

## Alternative Coatings

This tool is available in 8 diameters.

 Please consider the environment, before printing this document.