

HM

HRC

07210


Frese per stampi



Visit the online Product Sheet

F07210H00200009

2 flute corner radius end mill for ribbing

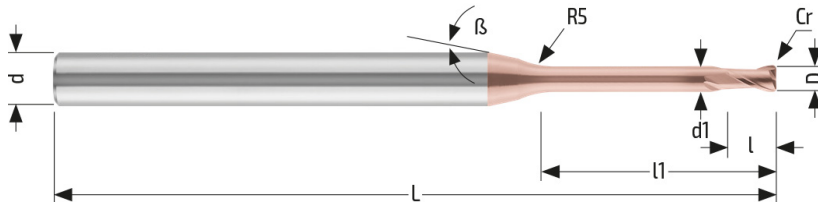

Silmax NORM

λ 30°



Cr

Details

Diameter of cutting edge D +0/-0,02	2,00
Corner Radius/Radius Cr/r	0,20
Cutting length l	3,00
Neck Relief Length l1	20,0
Neck diameter d1	1,90
Engaged Angle β	12,0
Overall Length L	60
Shank Diameter d h6	4,00
ϵ 0,5°	
ϵ 0,5°	21,50
ϵ 1,0°	
ϵ 1,0°	22,00
ϵ 2,0°	
ϵ 2,0°	22,73
ϵ 3,0°	
ϵ 3,0°	23,27
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials


Hardened steel 42 ÷ 52 HRC
Hardened steel 52 to 62 HRC

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 8 diameters.

 Please consider the environment, before printing this document.