

HM

HRC

07210


Frese per stampi



Visit the online
Product Sheet

F07210H00200039

2 flute corner radius end mill for ribbing

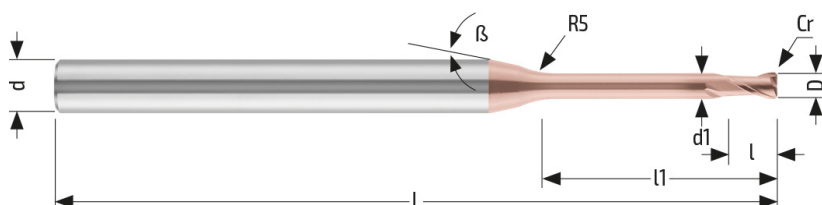

Silmax
NORM

λ 30°



×



Cr

Details

Diameter of cutting edge D +0/-0,02	2,00
Corner Radius/Radius Cr/r	0,30
Cutting length l	3,00
Neck Relief Length l1	12,0
Neck diameter d1	1,90
Engaged Angle β	12,0
Overall Length L	60
Shank Diameter d h6	4,00
ε 0,5°	
ε 0,5°	13,24
ε 1,0°	
ε 1,0°	13,62
ε 2,0°	
ε 2,0°	14,20
ε 3,0°	
ε 3,0°	14,66
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC



Hardened steel 52 to 62 HRC



Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 8 diameters.

 Please consider the environment, before printing this document.