


HM HRC T144 Frese per stampi

Visit the online Product Sheet

# F11440H01000001

4 Flutes end mill unequal flute spacing for roughing

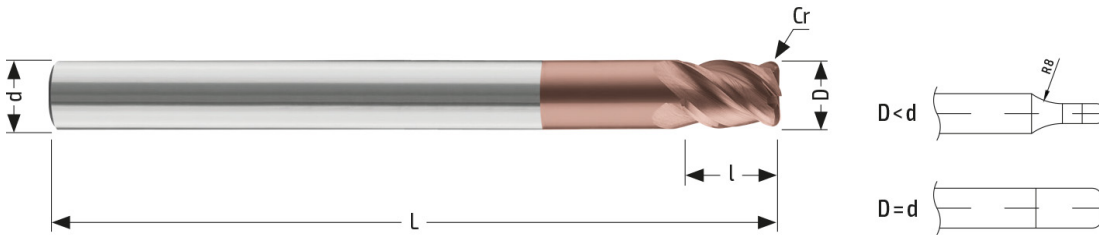

| Details                                    | Materials                      | Coatings                | Series long |
|--|--------------------------------|-------------------------|-------------|
| Diameter of cutting edge<br>D h6 10,00     | Steel < 800 n/mm <sup>2</sup>  | Balinit® Tisaflex (HMH) |             |
| Corner Radius/Radius<br>Cr/r 2,00          | Steel < 1000 n/mm <sup>2</sup> | Alternative Coatings    |             |
| Cutting length<br>l 10,00                  | Steel < 1300 n/mm <sup>2</sup> |                         |             |
| Overall Length<br>L 120                    | Grey cast iron                 |                         |             |
| Shank Diameter<br>d h5 10,00               | Spheroidal cast iron           |                         |             |
| Number of Flutes<br>Z 4                    | Hardened steel 42 ÷ 52 HRC     |                         |             |
| Shank references standard<br>Rif. gambo HA | Hardened steel 52 to 62 HRC    |                         |             |

This tool is available in 11 diameters.

Please consider the environment, before printing this document.