



HM HPC 1195 Frese ad alto rendimento

Visit the online Product Sheet

# F11950G02500001

5 flute end mill 5xD with unequal flute spacing for dynamic milling

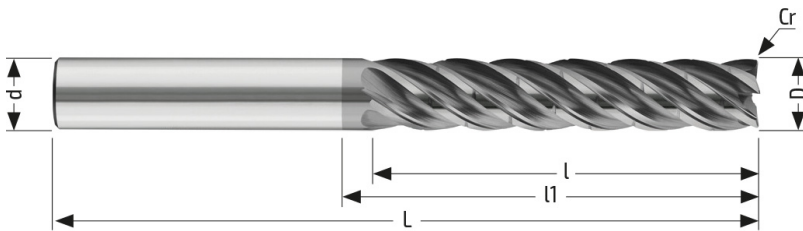

| Details                                    | Materials                      | Coatings               | Series long |
|--|--------------------------------|------------------------|-------------|
| Diameter of cutting edge<br>D h10 25,00    | Steel < 800 n/mm <sup>2</sup>  | Balinit® Alcrona (HMG) |             |
| Shank Diameter<br>d h5 25,00               | Steel < 1000 n/mm <sup>2</sup> | Alternative Coatings   |             |
| Overall Length<br>L 200                    | Steel < 1300 n/mm <sup>2</sup> |                        |             |
| Cutting length<br>l 125,00                 | Grey cast iron                 |                        |             |
| Neck Relief Length<br>l1 138,0             | Spheroidal cast iron           |                        |             |
| Neck Relief Depth<br>a 0,25                |                                |                        |             |
| Corner Radius/Radius<br>Cr/r 1,00          |                                |                        |             |
| Number of Flutes<br>Z 5                    |                                |                        |             |
| Shank references standard<br>Shank ref. HB |                                |                        |             |

This tool is available in 7 diameters.

Please consider the environment, before printing this document.