














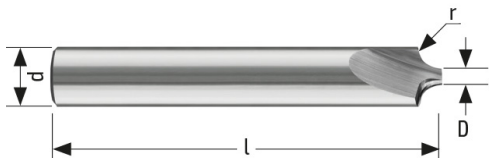


Visit the online Product Sheet


# HM010G125

Quarter circle cutter



Details	Materials	Coatings
Diameter of cutting edge D ±0,1      2,50	Steel < 800 n/mm <sup>2</sup> 	<u>Uncoated (HM0)</u>
Shank Diameter d h6      8,00	Steel < 1000 n/mm <sup>2</sup> 	<u>Alternative Coatings</u>
Overall Length L      50	Steel < 1300 n/mm <sup>2</sup> 	<u>Balinit® Alcrona (HMG)</u>
Corner Radius/Radius r      2,50	Ferritic/Martensitic steel 	
Number of Flutes Z      2	Austenitic steel 	
Shank references standard Rif. gambo      HA	PH Duplex 	
	Grey cast iron 	
	Aluminium 	
	Copper 	
	Thermoplastic resin 	
	Difficult-to-machine Superalloys 	
	Very difficult-to-machine Superalloys 	
	Titanium 	

This tool is available in 3 diameters and 2 coatings.

 Please consider the environment, before printing this document.