




Visit the online Product Sheet

HM0320030

VPlus endmill 60°

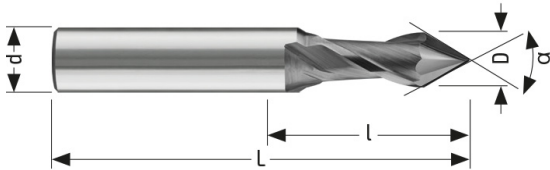

Details

| | |
|----------------------------------|------|
| Diameter of cutting edge D h9 | 3,00 |
| Shank Diameter d h6 | 4,00 |
| Overall Length L | 50 |
| Cutting length l | 6,00 |
| Front Angle α | 60 |
| Number of Flutes Z | 2 |

Materials

| | |
|---------------------------------------|---|
| Steel < 800 n/mm ² | <div style="width: 100%; height: 10px; background-color: #0070C0;"></div> |
| Steel < 1000 n/mm ² | <div style="width: 100%; height: 10px; background-color: #0070C0;"></div> |
| Steel < 1300 n/mm ² | <div style="width: 100%; height: 10px; background-color: #0070C0;"></div> |
| Ferritic/Martensitic steel | <div style="width: 100%; height: 10px; background-color: #FFC000;"></div> |
| Austenitic steel | <div style="width: 100%; height: 10px; background-color: #FFC000;"></div> |
| PH Duplex | <div style="width: 100%; height: 10px; background-color: #FFC000;"></div> |
| Grey cast iron | <div style="width: 100%; height: 10px; background-color: #D9534F;"></div> |
| Aluminium | <div style="width: 100%; height: 10px; background-color: #4CAF50;"></div> |
| Copper | <div style="width: 100%; height: 10px; background-color: #4CAF50;"></div> |
| Thermoplastic resin | <div style="width: 100%; height: 10px; background-color: #4CAF50;"></div> |
| Difficult-to-machine Superalloys | <div style="width: 100%; height: 10px; background-color: #795548;"></div> |
| Very difficult-to-machine Superalloys | <div style="width: 100%; height: 10px; background-color: #795548;"></div> |


Coatings

- Uncoated (HM0)

- Alternative Coatings

- Balinit® Alcrona (HMG)

This tool is available in 8 diameters and 2 coatings.

 Please consider the environment, before printing this document.