




Visit the online Product Sheet

HMG330050

VPlus endmill 90°

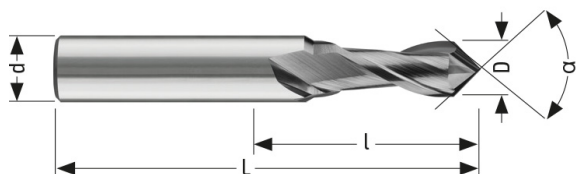

Details

Diameter of cutting edge D h9	5,00
Shank Diameter d h6	6,00
Overall Length L	50
Cutting length l	10,00
Front Angle α	90
Number of Flutes Z	2

Materials

Steel < 800 n/mm ²	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>
Steel < 1000 n/mm ²	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>
Steel < 1300 n/mm ²	<div style="width: 100%; height: 10px; background-color: #0070C0;"></div>
Ferritic/Martensitic steel	<div style="width: 100%; height: 10px; background-color: #FFC000;"></div>
Austenitic steel	<div style="width: 100%; height: 10px; background-color: #FFC000;"></div>
PH Duplex	<div style="width: 100%; height: 10px; background-color: #FFC000;"></div>
Grey cast iron	<div style="width: 100%; height: 10px; background-color: #D9534F;"></div>
Aluminium	<div style="width: 100%; height: 10px; background-color: #4CAF50;"></div>
Copper	<div style="width: 100%; height: 10px; background-color: #4CAF50;"></div>
Thermoplastic resin	<div style="width: 100%; height: 10px; background-color: #4CAF50;"></div>
Difficult-to-machine Superalloys	<div style="width: 100%; height: 10px; background-color: #795548;"></div>
Very difficult-to-machine Superalloys	<div style="width: 100%; height: 10px; background-color: #795548;"></div>


Coatings

Balinit® Alcrona (HMG)

Alternative Coatings

Uncoated (HM0)

This tool is available in 8 diameters and 2 coatings.

 Please consider the environment, before printing this document.