





Visit the online Product Sheet

# HMG4956060

Inverted cone shape rotary blurr, sharpened end

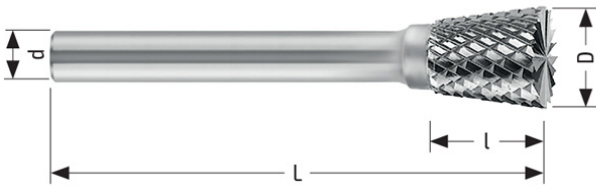

### Details

|   |      |
|---|------|
| Diameter of cutting edge<br>D +/-0,1    | 6,00 |
| Shank Diameter<br>d h7                  | 6,00 |
| Overall Length<br>L                     | 50   |
| Cutting length<br>l                     | 7,00 |
| Flute Inclination<br>$\alpha 2$         | -5,0 |
| Shank references standard<br>Shank ref. | HA   |

### Materials

|  |  |
|--|--|
| Steel < 800 n/mm <sup>2</sup>            |  |
| Steel < 1000 n/mm <sup>2</sup>           |  |
| Steel < 1300 n/mm <sup>2</sup>           |  |
| Ferritic/Martensitic steel               |  |
| Austenitic steel                         |  |
| PH Duplex                                |  |
| Grey cast iron                           |  |
| Aluminium                                |  |
| Copper                                   |  |
| Thermoplastic resin                      |  |
| Difficult-to-machine<br>Superalloys      |  |
| Very difficult-to-machine<br>Superalloys |  |
| Titanium                                 |  |

### Coatings

Balinit® Alcrona (HMG)

### Alternative Coatings

Uncoated (HM0)



This tool is available in 4 diameters and 2 coatings.

 Please consider the environment, before printing this document.