



Visit the online
Product Sheet

HM


TIS

284EV

Frese per titanio, superleghe e acciaio inox




HMH284120EV20W

4 flute end mill for high chip removal

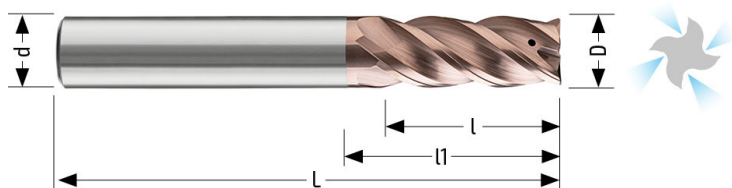

Silmax
NORM

$\lambda 38^\circ$
 $\lambda 40^\circ$



Cr

Details

Diameter of cutting edge D h10	12,00
Shank Diameter d h6	12,00
Overall Length L	83
Cutting length l	26,00
Neck Relief Length l1	36,0
Neck Relief Depth a	0,20
Corner Radius/Radius Cr/r	2,00
Chamfering 45°	0,00
Number of Flutes Z	4
Shank references standard Shank ref.	HB

Materials

Ferritic/Martensitic steel



Austenitic steel



PH Duplex



Titanium



Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 7 diameters.



 Please consider the environment, before printing this document.