

HMP

PHM

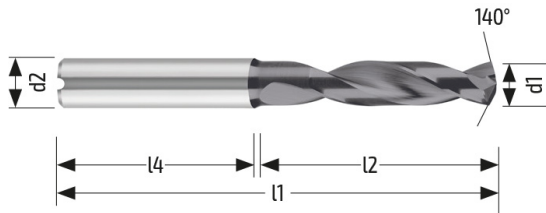
3030A

Punte alto rendimento

Visit the online
Product Sheet

HMX3030A055

3xD drill without internal coolant

DIN
6537KDIN
6535 HA
(Standard) λ 30°

140°

Details

| | |
|-----------------------------------|-------|
| Diameter of cutting edge d1 m7 | 5,50 |
| Shank Diameter d2 h6 | 6,00 |
| Cutting length lu | 20,00 |
| Flute length l2 | 28,0 |
| Shank length l4 | 36,0 |
| Overall Length l1 | 66 |

Materials

Steel < 1300 n/mm²

Grey cast iron

Coatings

Balinit® X-Pro (HMX)

Alternative Coatings

This tool is available in 171 diameters.

Please consider the environment, before printing this document.