


GUN GUN 5001 Punte a cannone e accessori



Visit the online Product Sheet

PCS50010173

Single-lip drill with brazed drill head for machining centres

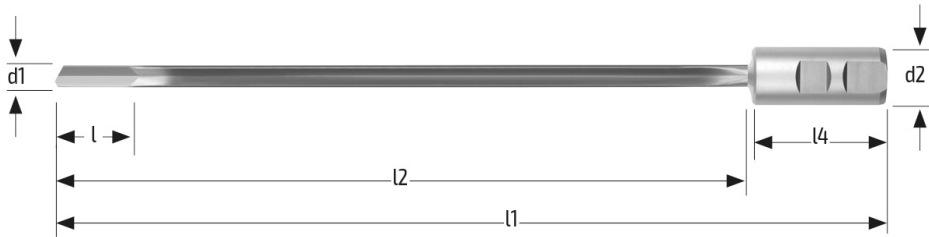

Details

| | |
|---|-------|
| Diameter of cutting edge d1 | 28,00 |
| Shank Diameter d2 h6 | 32,00 |
| Shank length l4 | 60,0 |
| Flute length L2 | 308,0 |
| Overall Length l1 | 400 |
| Cutting length l | 65,00 |
| Number of Flutes Z | 1 |
| Shank references standard Rif. gambo | HB |


Materials

| | |
|--|-------------------------------------|
| Steel < 800 n/mm ² | <input checked="" type="checkbox"/> |
| Steel < 1000 n/mm ² | <input checked="" type="checkbox"/> |
| Steel < 1300 n/mm ² | <input checked="" type="checkbox"/> |
| Mould steel | <input checked="" type="checkbox"/> |
| Ferritic/Martensitic steel | <input checked="" type="checkbox"/> |
| Austenitic steel | <input checked="" type="checkbox"/> |
| PH Duplex | <input checked="" type="checkbox"/> |
| Grey cast iron | <input checked="" type="checkbox"/> |
| Aluminium | <input checked="" type="checkbox"/> |
| Copper | <input checked="" type="checkbox"/> |
| Thermoplastic resin | <input checked="" type="checkbox"/> |
| Difficult-to-machine Superalloys | <input checked="" type="checkbox"/> |
| Very difficult-to-machine Superalloys | <input checked="" type="checkbox"/> |


Coatings

Uncoated (HM0)

Alternative Coatings

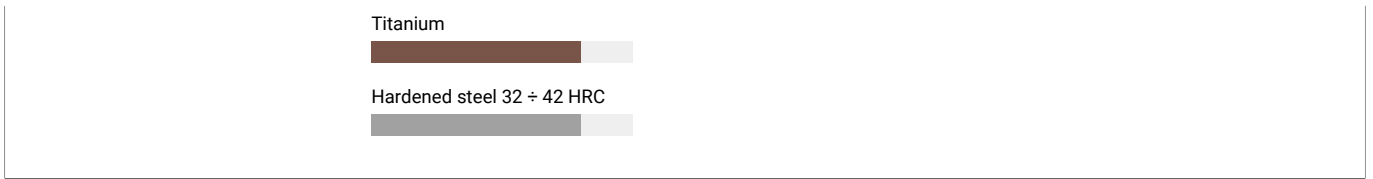

This tool is available in 34 diameters.

 Please consider the environment, before printing this document.