



GUN GUN 5002 Punte a cannone e accessori



Visit the online Product Sheet

PCS50020096

Single-lip drill with brazed drill head for drilling machines

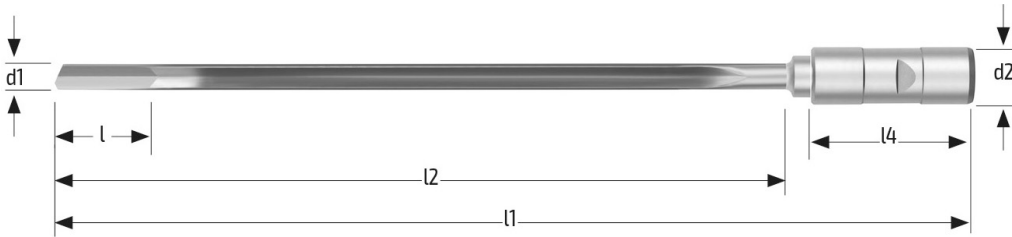

Details


| | |
|---|--------|
| Diameter of cutting edge d1 | 13,00 |
| Shank Diameter d2 h6 | 25,00 |
| Shank length l4 | 70,0 |
| Flute length L2 | 1900,0 |
| Overall Length l1 | 2000 |
| Cutting length l | 42,00 |
| Number of Flutes Z | 1 |
| Shank references standard Rif. gambo | DM |

Materials


| | |
|--|-------------------------------------|
| Steel < 800 n/mm ² | <input checked="" type="checkbox"/> |
| Steel < 1000 n/mm ² | <input checked="" type="checkbox"/> |
| Steel < 1300 n/mm ² | <input checked="" type="checkbox"/> |
| Mould steel | <input type="checkbox"/> |
| Ferritic/Martensitic steel | <input type="checkbox"/> |
| Austenitic steel | <input type="checkbox"/> |
| PH Duplex | <input type="checkbox"/> |
| Grey cast iron | <input type="checkbox"/> |
| Aluminium | <input type="checkbox"/> |
| Copper | <input type="checkbox"/> |
| Thermoplastic resin | <input type="checkbox"/> |
| Difficult-to-machine Superalloys | <input type="checkbox"/> |
| Very difficult-to-machine Superalloys | <input type="checkbox"/> |

Coatings

| | |
|----------------------|-------------------------------------|
| Uncoated (HM0) | <input checked="" type="checkbox"/> |
| Alternative Coatings | <input type="checkbox"/> |

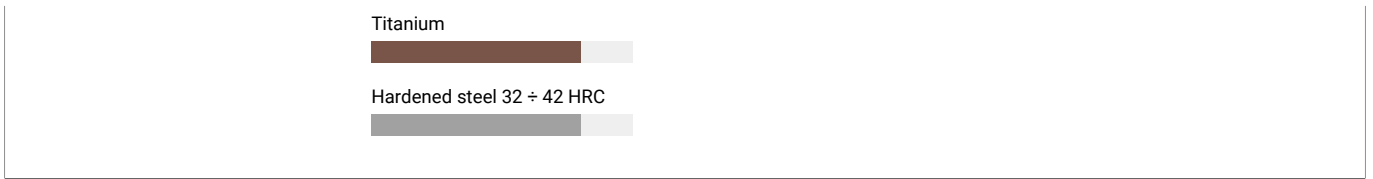

This tool is available in 36 diameters.

 Please consider the environment, before printing this document.