


HSS FRF 080F Frese frontali e a disco



Visit the online Product Sheet

# SIL08F050

Shell roughing end mill

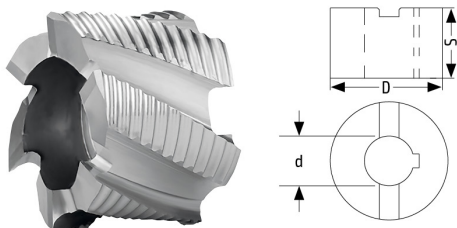

|             |             |            |   |  |  |
|-------------|-------------|------------|---|--|--|
| ISO<br>2586 | DIN<br>1880 | DIN<br>841 | $\lambda 30^\circ$<br>$\gamma 12^\circ$ |  |  |
|-------------|-------------|------------|---|--|--|

| Details                                 | Materials                          | Coatings             |
|---|------------------------------------|----------------------|
| Diameter of cutting edge<br>D k12 50,00 | Steel < 800 n/mm <sup>2</sup><br>  | Uncoated (SIL)       |
| Thickness<br>S k12 36,0                 | Steel < 1000 n/mm <sup>2</sup><br> | Alternative Coatings |
| Hole diameter<br>d 0,00000 22,0         | Grey cast iron<br>                 |                      |
| References standard<br>Din DIN 1880     |                                    |                      |
| Number of Flutes<br>Z 6                 |                                    |                      |

This tool is available in diameters.

Please consider the environment, before printing this document.