







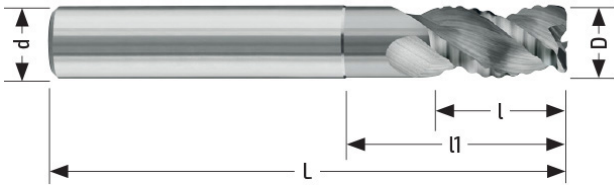

HM ALU 015 Frese per leghe leggere

 Visit the online Product Sheet


ALU | 015

3 flute roughing end mill with chip breaker, regular version



Materials	Coatings	Series normal
Aluminium 	Uncoated (HM0)	
Copper 	AluSpeed® (HMA)	
Thermoplastic resin 		

10 Articoli | 2 Pages | This tool is available in 5 diameters and 2 coatings.

 Please consider the environment, before printing this document.

D h10	d h6	L	l	l1	a	Cr/r	Z	Shank ref.	Coatings	Code
8,00	8,00	63	12,00	24,0	0,15	1,00	3	HA	Uncoated (HM0)	HM0015080
10,00	10,00	72	15,00	30,0	0,15	1,00	3	HA	Uncoated (HM0)	HM0015100
12,00	12,00	83	18,00	36,0	0,20	1,00	3	HA	Uncoated (HM0)	HM0015120
16,00	16,00	92	24,00	42,0	0,20	1,00	3	HA	Uncoated (HM0)	HM0015160
20,00	20,00	104	30,00	52,0	0,20	1,00	3	HA	Uncoated (HM0)	HM0015200
8,00	8,00	63	12,00	24,0	0,15	1,00	3	HA	AluSpeed® (HMA)	HMA015080
10,00	10,00	72	15,00	30,0	0,15	1,00	3	HA	AluSpeed® (HMA)	HMA015100
12,00	12,00	83	18,00	36,0	0,20	1,00	3	HA	AluSpeed® (HMA)	HMA015120
16,00	16,00	92	24,00	42,0	0,20	1,00	3	HA	AluSpeed® (HMA)	HMA015160
20,00	20,00	104	30,00	52,0	0,20	1,00	3	HA	AluSpeed® (HMA)	HMA015200