


HM ALU 765 Frese per leghe leggere

Visit the online Product Sheet

# ALU | 765

2 flute ball nose end mill, for high chip removal

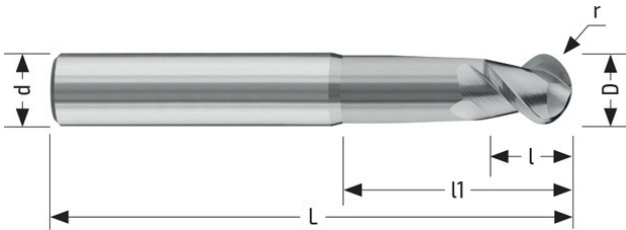

Materials	Coatings	Series normal
Aluminium	Uncoated (HM0)	[Bar chart showing performance levels]
Copper	AluSpeed® (HMA)	[Bar chart showing performance levels]
Thermoplastic resin		[Bar chart showing performance levels]

18 Articoli | 2 Pages | This tool is available in 9 diameters and 2 coatings.

♻️ Please consider the environment, before printing this document.

D h10	d h6	L	l	l1	a	α	Cr/r	Z	Shank ref.	Coatings	Code
3,00	3,00	50	3,00	22,0	0,15	1	1,50	2	HA	Uncoated (HM0)	HM0765030
4,00	4,00	50	4,00	22,0	0,20	1	2,00	2	HA	Uncoated (HM0)	HM0765040
5,00	5,00	50	5,00	22,0	0,20	1	2,50	2	HA	Uncoated (HM0)	HM0765050
6,00	6,00	57	6,00	21,0	0,25	2	3,00	2	HA	Uncoated (HM0)	HM0765060
8,00	8,00	63	8,00	27,0	0,35	2	4,00	2	HA	Uncoated (HM0)	HM0765080
10,00	10,00	72	10,00	32,0	0,50	2	5,00	2	HA	Uncoated (HM0)	HM0765100
12,00	12,00	83	12,00	38,0	0,50	2	6,00	2	HA	Uncoated (HM0)	HM0765120
16,00	16,00	92	16,00	44,0	0,80	2	8,00	2	HA	Uncoated (HM0)	HM0765160
20,00	20,00	104	20,00	54,0	0,90	2	10,00	2	HA	Uncoated (HM0)	HM0765200
3,00	3,00	50	3,00	22,0	0,15	1	1,50	2	HA	AluSpeed® (HMA)	HMA765030
4,00	4,00	50	4,00	22,0	0,20	1	2,00	2	HA	AluSpeed® (HMA)	HMA765040
5,00	5,00	50	5,00	22,0	0,20	1	2,50	2	HA	AluSpeed® (HMA)	HMA765050
6,00	6,00	57	6,00	21,0	0,25	2	3,00	2	HA	AluSpeed® (HMA)	HMA765060
8,00	8,00	63	8,00	27,0	0,35	2	4,00	2	HA	AluSpeed® (HMA)	HMA765080
10,00	10,00	72	10,00	32,0	0,50	2	5,00	2	HA	AluSpeed® (HMA)	HMA765100
12,00	12,00	83	12,00	38,0	0,50	2	6,00	2	HA	AluSpeed® (HMA)	HMA765120
16,00	16,00	92	16,00	44,0	0,80	2	8,00	2	HA	AluSpeed® (HMA)	HMA765160
20,00	20,00	104	20,00	54,0	0,90	2	10,00	2	HA	AluSpeed® (HMA)	HMA765200